


TRANSPONDER AND COMPONENTS

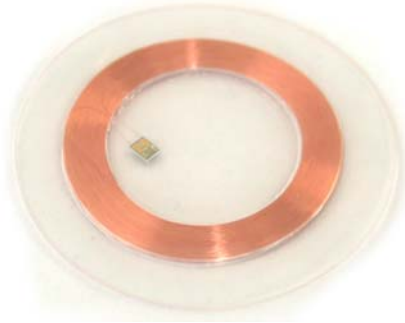

Disc-PET

- 125 kHz / 13,56 MHz
- different dimensions
- resistant to dirt, dust, water
- operating -20° bis 60°C

Technical Data:

Diameter:	16,00 / 18,00 / 20,00 / 22,00 /25,00 /26,50 / 30,00 /40,00 / 50,00 mm	
Thickness:	Thickness depends on type of chip ca. 0,6 mm	
Tolerance:	Tolerance Dia \pm 0,5 mm	
Material:	PET (Option one side adhesive)	
Color:	Transparent	
Frequency:	125 KHz	13,56 MHz
Transponder:	EM4102	Mifare (all types)
	EM4x50	I-Code (all types)
	Hitag 1	Legic Prime MIM256 /1024
	Hitag 2	Legic Advant ATC128 /256/512/1024/2048/4096
	Hitag S 256 / 2048	
	ATA 5567 /5577	
Chemical resistance:	water, aqueous solution of salts	
Storage:	-20°C .. +60°C	
Operating:	-20°C .. +60°C	